

PT-G7828 系列

IEC 61850-3 28 埠 Layer 3 全 Gigabit 模組化網管型乙太網路交換器



特色與優點

- 針對 EMC，符合 IEC 61850-3 Edition 2 Class 2
- 支援熱插拔網路介面及電源模組，允許不斷電下連續運作
- 內建 MMS Server，採用 IEC 61850-90-4 交換器資料模型，適用於 Power SCADA
- 支援 IEEE 1588 (PTP) 硬體時間戳記

認證



EN 50121-4

IEC 61850-3 IEEE 1613



簡介

PT-G7828 模組化交換器最多可提供 28 個 Gigabit 連接埠，包括 4 個固定連接埠、6 個介面模組插槽，以及 2 個電源模組插槽，確保適用多種應用的彈性。PT-G7828 系列專為滿足不斷變化的網路需求而設計，其中包括可熱插拔的模組設計，讓您無需關機即可變更或新增裝置。

多重乙太網路模組 (RJ45、SFP 和 PoE) 及電源模組 (24/48 VDC、110/220 VAC/VDC) 提供更大靈活性，適用不同操作條件。交換器支援完整的 Gigabit 平台，提供足夠的頻寬來設定乙太網路骨幹。各項認證包括 IEC 61850 Edition2 Class2，以確保高可用性及廣泛用途。

規格

Ethernet Interface

10/100/1000BaseT(X) Ports (RJ45 connector)	2
100/1000BaseSFP Ports	2
Module	6
Slot Combination	See the LM-7000H datasheet for Gigabit Ethernet module and PoE+ module information
Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3ab for 1000BaseT(X) IEEE 802.3z for 1000BaseX IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1X for authentication IEEE 802.3ad for Port Trunk with LACP IEEE 802.3x for flow control

Ethernet Software Features

Management	IPv4/IPv6 SNMP Inform SNMPv1/v2c/v3 DHCP Server/Client DHCP Option 66/67/82 BOOTP TFTP LLDP RARP HTTP HTTPS Telnet Flow control Back Pressure Flow Control Port Mirror Fiber check Dying Gasp SMTP Syslog
MIB	MIB-II Ethernet-like MIB Bridge MIB P-BRIDGE MIB Q-BRIDGE MIB RSTP MIB RMON MIB Groups 1, 2, 3, 9
Filter	802.1Q GMRP GVRP IGMP v1/v2/v3 QinQ VLAN
Redundancy Protocols	Link Aggregation MSTP RSTP STP Turbo Chain Turbo Ring v1/v2 V-ON MRP
Security	RADIUS TACACS+ SSH Port Lock Broadcast storm protection MAB authentication Sticky MAC Access control list
Time Management	NTP Server/Client SNTP IEEE 1588v2 PTP (hardware-based)
Power Substation	IEC 61850 QoS GOOSE Check
Industrial Protocols	EtherNet/IP Modbus TCP
Unicast Routing	Static Route RIPV1/V2 OSPF
Multicast Routing	DVMRP PIM-DM
Routing Redundancy	VRRP

Switch Properties

Priority Queues	8
Max. No. of VLANs	256
VLAN ID Range	VID 1 to 4094
IGMP Groups	4096
MAC Table Size	16 K
Packet Buffer Size	12 Mbits
Jumbo Frame Size	9.6 KB

Serial Interface

Console Port	RS-232 (RJ45)
--------------	---------------

USB Interface

Storage Port	USB Type A
--------------	------------

Power Parameters

Input Voltage	<p>With PWR-HV-P48 installed: 110/220 VDC/VAC for the switch system 48 VDC for PoE system (53 to 57 VDC is recommended for PoE+ devices)</p> <p>With PWR-LV-P48 installed: 24/48 VDC for the switch system 48 VDC for PoE system (53 to 57 VDC is recommended for PoE+ devices)</p> <p>With PWR-HV-NP installed: 110/220 VDC/VAC for the switch system</p> <p>With PWR-LV-NP installed: 24/48 VDC for the switch system</p>
Operating Voltage	<p>With PWR-HV-P48 installed: 88 to 300 VDC, 90 to 264 VAC for the switch system 46 to 57 VDC for PoE systems</p> <p>With PWR-LV-P48 installed: 18 to 72 VDC for the switch system 46 to 57 VDC for PoE systems</p> <p>With PWR-HV-NP installed: 88 to 300 VDC, 90 to 264 VAC for the switch system</p> <p>With PWR-LV-NP installed: 18 to 72 VDC for the switch system</p>
Input Current	<p>With PWR-HV-P48 installed: PWR input current (switch system) Max. 0.11 A @ 110 VDC Max. 0.06 A @ 220 VDC Max. 0.29 A @ 110 VAC Max. 0.18 A @ 220 VAC EPS input current (PoE system) Max. 0.53 A @ 48 VDC (excluding power consumption of PoE devices)</p> <p>With PWR-LV-P48 installed: PWR input current (switch system) Max. 0.53 A @ 24 VDC Max. 0.28 A @ 48 VDC EPS input current (PoE system) Max. 0.53 A @ 48 VDC (excluding power consumption of PoE devices)</p> <p>With PWR-HV-NP installed: PWR input current (switch system) Max. 0.11 A @ 110 VDC Max. 0.06 A @ 220 VDC Max. 0.29 A @ 110 VAC Max. 0.18 A @ 220 VAC</p> <p>With PWR-LV-NP installed: PWR input current (switch system) Max. 0.53 A @ 24 VDC Max. 0.28 A @ 48 VDC</p>

Physical Characteristics

IP Rating	IP30
Dimensions	443 x 44 x 280 mm (17.44 x 1.73 x 11.02 in)
Weight	3080 g (6.8 lb)
Installation	19-inch rack mounting

Environmental Limits

Operating Temperature	-40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Power Substation	IEC 61850-3 Edition 2 Class 2 (EMC) IEEE 1613
Railway	EN 50121-4
Safety	UL 62368-1 IEC 62368-1

MTBF

Time	449,542 hrs
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/tw/warranty

Package Contents

Device	1 x PT-G7828 Series switch
Cable	USB cable (Type A male to Micro USB type B)
Installation Kit	2 x cap, for Micro-B USB port 1 x cap, metal, for ABC-02 USB storage port 2 x rack-mounting ear 2 x cap, plastic, for SFP slot
Documentation	1 x quick installation guide 1 x warranty card 1 x substance disclosure table 1 x product certificates of quality inspection, Simplified Chinese 1 x product notice, Simplified Chinese
Note	SFP modules, modules from the LM-7000H Module Series, and/or modules from the PWR Power Module Series need to be purchased separately for use with this product.

尺寸

單位：公釐 (英吋)

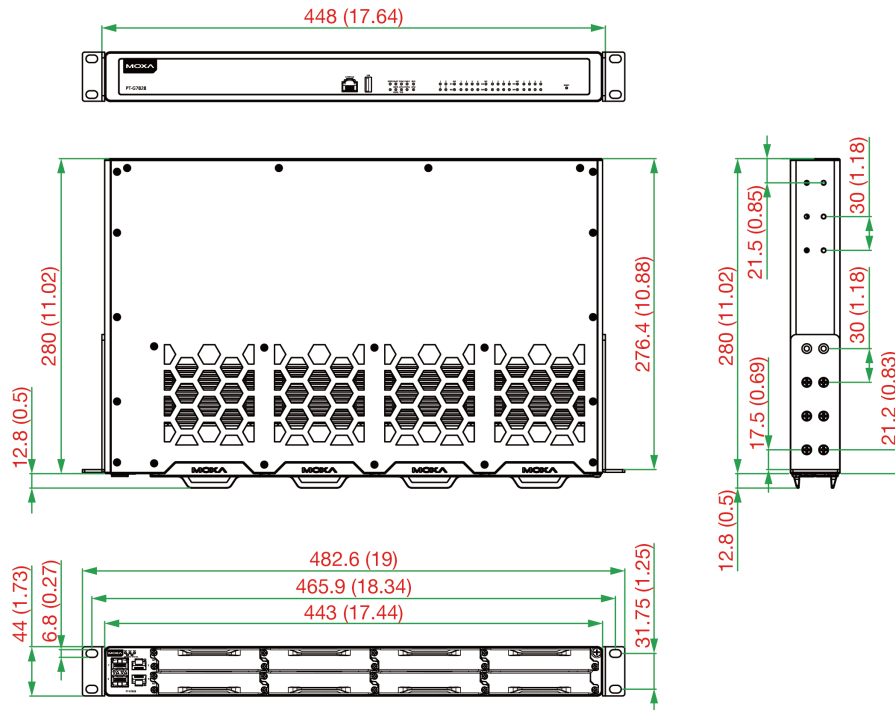

訂購資訊

Model Name	Layer	100/1000Base SFP Slots	10/100/1000BaseT(X) Ports RJ45 Connector	PoE Ports, 10/100/1000Base T(X) RJ45 Connector	Operating Temp.
PT-G7828	3	2 to 26	2 to 26	0 to 24	-40 to 85°C

配件 (選購)

Storage Kits

ABC-02-USB	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature
ABC-02-USB-T	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature

Power Supplies

PWR-HV-P48	Power supply module (110/220 VAC/VDC) with system power input, relay, PoE power input
PWR-LV-P48	Power supply module (24/48 VDC) with system power input, relay, PoE power input
PWR-HV-NP	Power supply module (110/220 VAC/VDC) with system power input, relay
PWR-LV-NP	Power supply module (24/48 VDC) with system power input, relay

LM-7000H Module Series

LM-7000H-4GTX	Gigabit Ethernet module with 4 10/100/1000BaseT(X) ports
LM-7000H-4GSFP	Gigabit Ethernet module with 4 100/1000BaseSFP slots
LM-7000H-4GPoE	Gigabit Ethernet module with 4 10/100/1000BaseT(X) IEEE 802.3af/at PoE+ ports
LM-7000H-4TX	Fast Ethernet module with 4 10/100BaseT(X) ports
LM-7000H-4PoE	Fast Ethernet module with 4 10/100BaseT(X) IEEE 802.3af/at PoE+ ports

SFP Modules

SFP-1FELLC-T	SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature
--------------	---

SFP-1FEMLC-T	SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature
SFP-1FESLC-T	SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1G10ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G10ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G10BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G10BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G20ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G20ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G20BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G20BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G40ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G40ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G40BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G40BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1GEZXC	SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature
SFP-1GEZXC-120	SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC-T	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature
SFP-1GLHXC	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature
SFP-1GLHXC-T	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1GLSXC	SFP module with 1 1000BaseLSXC port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature
SFP-1GLSXC-T	SFP module with 1 1000BaseLSXC port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature
SFP-1GLXLC	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature
SFP-1GLXLC-T	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature
SFP-1GSXC	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature
SFP-1GSXC-T	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature
SFP-1GZXC	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature
SFP-1GZXC-T	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature

Software

MXview-50	Industrial network management software with a license for 50 nodes (by IP address)
MXview-100	Industrial network management software with a license for 100 nodes (by IP address)
MXview-250	Industrial network management software with a license for 250 nodes (by IP address)
MXview-500	Industrial network management software with a license for 500 nodes (by IP address)
MXview-1000	Industrial network management software with a license for 1000 nodes (by IP address)
MXview-2000	Industrial network management software with a license for 2000 nodes (by IP address)
MXview Upgrade-50	License expansion of MXview industrial network management software by 50 nodes (by IP address)

© Moxa Inc. 版權所有.2023 年 5 月 30 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。