

EDR-810 系列

8 FE 銅纜 + 2 GbE SFP 多埠工業安全路由器



特色與優點

- 8+2G 一體式防火牆/NAT/VPN/路由器/交換器
- 使用 VPN 保護遠端存取通道
- 狀態防火牆保護關鍵資產
- 使用 PacketGuard 技術檢查工業協定
- 透過網路位址轉譯 (NAT) 輕鬆設定網路
- RSTP/Turbo Ring 備援協定增強網路冗餘
- -40 至 75°C 操作溫度範圍 (-T 型號)
- 基於 IEC 62443/NERC CIP 的安全功能
- 符合 IEC 61162-460 海事網路資安標準
- 使用智慧型 SettingCheck 功能檢查防火牆設置

認證



EN 50121-4



簡介

EDR-810 是一款高整合式工業級多埠安全路由器，具防火牆/NAT/VPN 和託管 Layer 2 交換功能。專為關鍵遠端控制或監控網路上的乙太網路型安全應用而設計，並提供電子安全邊界來保護關鍵網路資產，包括淨水站的泵浦處理系統、石油和天然氣應用中的 DCS 系統、以及工廠自動化中的 PLC/SCADA 系統。EDR-810 系列包括以下網路安全功能：

- 防火牆/NAT：防火牆規則控制不同信任區域之間的網路流量，而網路位址轉換 (NAT) 可防護內部 LAN 免受外部主機未經授權活動的影響。
- VPN：虛擬私人網路 (VPN) 旨在為使用者於公共網路存取私人網路時，提供安全的通訊通道。VPN 使用 IPsec (網際網路安全協定) 伺服器或用戶端模式對網路層的所有 IP 資料包進行加密和認證，確保機密性和發送者身份驗證。

EDR-810 的「WAN 路由快速設定」為使用者提供了一種簡易的方法，來設定 WAN 和 LAN 連接埠，只需四個步驟即可建立路由功能。此外，EDR-810 的「快速自動化設定檔」為工程師提供一種簡單的方法，透過通用自動化協定 (包括 EtherNet/IP、Modbus TCP、EtherCAT、FOUNDATION Fieldbus 和 PROFINET)，來設置防火牆過濾功能。使用者只需按一下，即可透過易於使用的 Web UI 輕鬆建立安全的乙太網路，以及 EDR-810 能夠執行深度 Modbus TCP 資料包檢查。同時也提供可在 -40 至 75°C 危險環境中可靠運作的寬溫度範圍型號。

規格

Input/Output Interface

Alarm Contact Channels	Resistive load: 1 A @ 24 VDC
Buttons	Reset button
Digital Input Channels	+13 to +30 V for state 1 -30 to +3 V for state 0 Max. input current: 8 mA

Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	8
100/1000BaseSFP Slots	2
Standards	IEEE 802.1Q for VLAN Tagging IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) Static Port Trunk IEEE 802.3u for 100BaseT(X) IEEE 802.3x for flow control IEEE 802.3z for 1000BaseSX/LX/LHX/ZX

Ethernet Software Features

Broadcast Forwarding	IP directed broadcast, broadcast forwarding
Management	Back Pressure Flow Control DDNS DHCP Server/Client Web Console (HTTP/HTTPS) LLDP QoS/CoS/ToS SNMPv1/v2c/v3 Telnet TFTP
Multicast Routing	DVMRP PIM-SM PIM-SSM
Redundancy Protocols	RSTP STP Turbo Ring v2
Routing	Throughput: 10,000 packets per second (max. 100 Mbps)
Routing Redundancy	VRRP
Security	All models: HTTPS/SSL, SSH, L2TP (server), RADIUS EDR-810-VPN-2GSFP Series: HTTPS/SSL, SSH, IPsec, OpenVPN (client and server), UDP and TCP Tunnel mode (routing) and TAP mode (bridge), L2TP (server), RADIUS L2TP (server) RADIUS
Time Management	NTP Server/Client SNTP
Unicast Routing	OSPF RIPV1/V2 Static Route
Filter	IGMP v1/v2/v3

Switch Properties

VLAN ID Range	VID 1 to 4094
IGMP Groups	256
Max. No. of VLANs	16

LED Interface

LED Indicators	STATE, PWR1, PWR2, FAULT, 10/100/1000M
----------------	--

DoS and DDoS Protection

Technology	ARP-Flood FIN Scan ICMP-Death NEWWithout-SYN Scan NMAP-ID Scan NMAP-Xmas Scan Null Scan SYN/FIN Scan SYN/RST Scan SYN-Flood Xmas Scan
------------	---

Firewall

Deep Packet Inspection	Modbus TCP Modbus UDP
Filter	DDoS Ethernet protocols ICMP IP address MAC address Ports
Quick Automation Profiles	DNP EtherCAT EtherNet/IP FOUNDATION Fieldbus FTP HTTP IEC 60870-104 IPsec L2TP LonWorks Modbus TCP PPTP PROFINET RADIUS SSH Telnet
Stateful Inspection	Router firewall Transparent (bridge) firewall
Throughput	Max. 10,000 packets per second (max. 100 Mbps)

IPsec VPN

Authentication	EDR-810-VPN-2GSFP Series: MD5 and SHA (SHA-256), RSA (key size: 1024-bit, 2048-bit), X.509 v3 certificate
Concurrent VPN Tunnels	EDR-810-VPN-2GSFP Series: Max. 10 IPsec VPN tunnels
Encryption	EDR-810-VPN-2GSFP Series: DES, 3DES, AES-128, AES-192, AES-256
Protocols	EDR-810-VPN-2GSFP Series: IPsec, L2TP (server), PPTP (client)
Throughput	EDR-810-VPN-2GSFP Series: Max. 17 Mbps (Conditions: AES-256, SHA-256)

NAT

Features	1-to-1 N-to-1 Port forwarding
----------	-------------------------------------

OpenVPN

Authentication	EDR-810-VPN-2GSFP Series: User password by MD5 and SHA1
Concurrent VPN Tunnels	EDR-810-VPN-2GSFP Series: Client Mode: max. 2 external servers

	Server Mode: max. 5 external clients
Encryption	EDR-810-VPN-2GSFP Series: AES-128/192/256 CBC, Blowfish CBC, DES CBC, DES-EDE3 CBC
Protocols	EDR-810-VPN-2GSFP Series: OpenVPN (client and server), UDP, and TCP Tunnel mode (routing) and TAP mode (bridge)
Throughput	EDR-810-VPN-2GSFP Series: Max. 5 Mbps

Real-Time Firewall / VPN Event Log

Event Type	All models: Firewall event EDR-810-VPN-2GSFP Series: VPN event
Media	Local storage SNMP Trap Syslog server

Serial Interface

Console Port	RS-232 (TxD, RxD, GND), 3-pin (115200, n, 8, 1)
--------------	---

Power Parameters

Connection	Removable terminal block
Input Voltage	12 to 48 VDC
Input Current	0.706 A @ 12 VDC, 0.353 A @ 24 VDC, 0.187 A @ 48 VDC
Reverse Polarity Protection	Supported

Physical Characteristics

Housing	Metal
Dimensions	53.6 x 135 x 105 mm (2.11 x 5.31 x 4.13 in)
Weight	830 g (2.10 lb)
Installation	DIN-rail mounting Wall mounting (with optional kit)

Environmental Limits

Operating Temperature	Standard Models: -10 to 60°C (14 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

Safety	UL 508
EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Hazardous Locations	ATEX

	Class I Division 2
Maritime	DNV
Traffic Control	NEMA TS2
Railway	EN 50121-4
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6
Industrial Cybersecurity	IEC 61162-460

MTBF

Time	981,954 hrs
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/tw/warranty

Package Contents

Device	1 x EDR-810 Series secure router
Cable	1 x DB9 female to RJ45 10-pin
Installation Kit	4 x cap, plastic, for RJ45 port 2 x cap, plastic, for SFP slot
Documentation	1 x document and software CD 1 x quick installation guide 1 x warranty card
Note	SFP modules need to be purchased separately for use with this product.

尺寸

單位：公釐 (英吋)

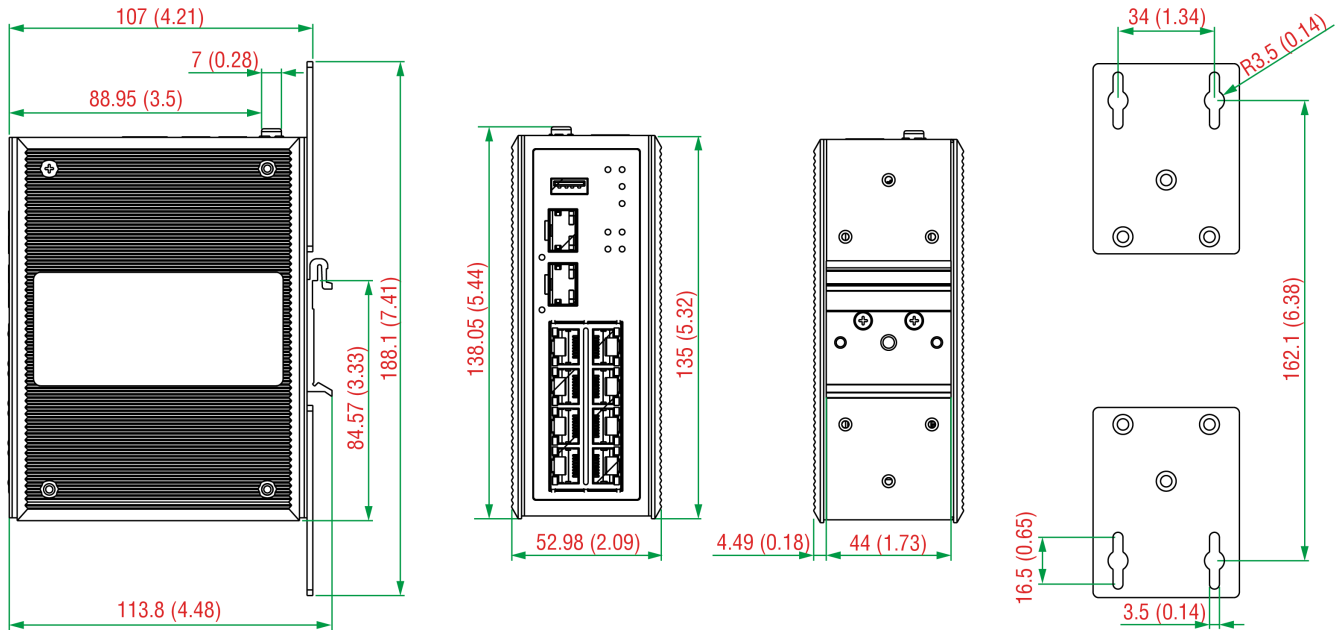

Side View

Front View

Rear View/
DIN-Rail Kit

Panel-Mounting Kit

訂購資訊

Model Name	10/100BaseT(X) Ports RJ45 Connector	100/1000Base SFP Slots	Firewall	NAT	VPN	Operating Temp.
EDR-810-2GSFP	8	2	✓	✓	–	-10 to 60°C
EDR-810-2GSFP-T	8	2	✓	✓	–	-40 to 75°C
EDR-810-VPN-2GSFP	8	2	✓	✓	✓	-10 to 60°C
EDR-810-VPN-2GSFP-T	8	2	✓	✓	✓	-40 to 75°C

配件 (選購)

Storage Kits

ABC-02-USB	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature
ABC-02-USB-T	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature

SFP Modules

SFP-1FELLC-T	SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1FEMLC-T	SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature
SFP-1FESLC-T	SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1G10ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G10ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G10BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature

SFP-1G10BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G20ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G20ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G20BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G20BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G40ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G40ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G40BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G40BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1GEZXLC	SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature
SFP-1GEZXLC-120	SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC-T	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature
SFP-1GLHLC	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC-T	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature
SFP-1GLHXL	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature
SFP-1GLHXL-T	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1GLSXL	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature
SFP-1GLSXL-T	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature
SFP-1GLXL	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature
SFP-1GLXL-T	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature
SFP-1GSXL	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature
SFP-1GSXL-T	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature
SFP-1GZXL	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature
SFP-1GZXL-T	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1GTXRJ45-T	SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature

Power Supplies

DR-120-24	120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature
DR-4524	45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature
DR-75-24	75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature

MDR-40-24	DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
MDR-60-24	DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature

Rack-Mounting Kits

RK-4U	19-inch rack-mounting kit
-------	---------------------------

Wall-Mounting Kits

WK-51-01	Wall mounting kit with 2 plates (51.6 x 67 x 2 mm) and 6 screws
----------	---

Software

MXview-50	Industrial network management software with a license for 50 nodes (by IP address)
MXview-100	Industrial network management software with a license for 100 nodes (by IP address)
MXview-250	Industrial network management software with a license for 250 nodes (by IP address)
MXview-500	Industrial network management software with a license for 500 nodes (by IP address)
MXview-1000	Industrial network management software with a license for 1000 nodes (by IP address)
MXview-2000	Industrial network management software with a license for 2000 nodes (by IP address)
MXview Upgrade-50	License expansion of MXview industrial network management software by 50 nodes (by IP address)

© Moxa Inc. 版權所有.2023 年 1 月 5 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。