

# EDS-P510A 系列

8+2G 埠 Gigabit PoE+ 網管型乙太網路交換器含 8 個 IEEE 802.3af/at PoE+ 連接埠



## 特色與優點

- 8 個內建 PoE+ 連接埠，與 IEEE 802.3af/at 相容
- 每個 PoE+ 連接埠輸出可達 36 W
- 3 kV LAN 突波保護，可用於極端室外環境
- PoE 診斷，可進行受電設備模式分析
- 2 個 Gigabit 複合連接埠，可進行高頻寬與長距離通訊
- 在 -40 至 75°C 下以 240 W 全 PoE + 負載運行
- 支援 MXstudio，輕鬆實現可視化的工業網路管理
- V-ON™ 可確保毫秒等級的 Multicast 資料和視訊網路復原

## 認證



## 簡介

Moxa 的 EDS-P510A 系列擁有 8 個 10/100BaseT(X)、802.3af (PoE) 和 802.3at (PoE+) 相容的乙太網路連接埠，以及 2 個複合 Gigabit 乙太網路連接埠。EDS-P510A-8PoE 乙太網路交換器在標準模式下每 PoE+ 連接埠可提供最高 30 瓦電力，同時在工業級高覆載 PoE 裝置可允許高達 36 瓦的高功率輸出，例如附帶雨刷/加熱器，可耐風雨的 IP 監視攝影機、高效能的無線存取點以及 IP 電話。EDS-P510A 乙太網路系列用途極為廣泛，SFP 光纖連接埠可將資料從裝置傳輸至控制中心（最遠可達 120 公里），並且具有高度 EMI 抗擾性。

乙太網路交換器支援各式管理功能，以及 STP/RSTP、Turbo Ring、Turbo Chain、PoE 電源管理、PoE 裝置自動檢查、PoE 電力排程、PoE 診斷、IGMP、VLAN、QoS、RMON、頻寬管理以及連接埠鏡像。EDS-P510A 系列是為在嚴峻的室外應用中提供 3 kV 突波保護，增加 PoE 系統可靠性所設計。

## 附加特色與優點

- 支援不同的 PoE 輸出設定（高功率 36 W、Force 與 Legacy 型號），提供最大的受電設備相容性
- 支援 Smart PoE 功能（PoE 診斷、PD 故障檢查、PoE 排程、PoE 事件警告）以加強 PoE 運作效率
- 命令列介面 (CLI) 快速設定主要網管功能
- DHCP Option 82 以不同原則指派 IP 位址
- 支援 EtherNet/IP 和 Modbus TCP 通訊協定以進行設備管理和監控
- 支援 Turbo Ring 和 Turbo Chain（對於 250 台交換器斷線復連時間小於 20 毫秒）<sup>1</sup>、RSTP/STP 和 MSTP 網路備援
- 相容於 PROFINET 通訊協定以進行透通式數據傳輸
- IGMP snooping 和 GMRP，用於過濾 multicast 流量
- 以連接埠為基礎的 VLAN、IEEE 802.1Q VLAN 以及 GVRP，用來簡化網路規劃
- QoS（IEEE 802.1p/1Q 和 TOS/DiffServ）提高資料傳送穩定性
- Port Trunking 可將頻寬使用率最佳化
- 支援 TACACS+、IEEE 802.1X、SNMPv3、HTTPS 和 SSH，強化網路安全
- 連接埠鎖定功能可依據 MAC 位址封鎖未經授權的存取
- SNMPv1/v2c/v3，支援不同層級的網路管理
- RMON 提供主動且有效率的網路監控
- 頻寬管理可預防不穩定的網路狀態出現
- Port mirroring 可用於除錯
- 發生狀況時可透過電子郵件或是繼電器輸出自動發出告警

1. Gigabit 乙太網路斷線復連時間小於 50 毫秒

## 規格

### Ethernet Interface

Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+)	2 Full/Half duplex mode Auto MDI/MDI-X connection Auto negotiation speed
PoE Ports (10/100BaseT(X), RJ45 connector)	8 Full/Half duplex mode Auto MDI/MDI-X connection Auto negotiation speed
Standards	IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1X for authentication IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) IEEE 802.3ad for Port Trunk with LACP IEEE 802.3af/at for PoE/PoE+ output IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control IEEE 802.3z for 1000BaseSX/LX/LHX/ZX

### Ethernet Software Features

Filter	GMRP, GVRP, IGMP v1/v2, Port-based VLAN
Industrial Protocols	EtherNet/IP, Modbus TCP
Management	Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Fiber check, Flow control, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP
MIB	Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB
Redundancy Protocols	LACP, Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2
Security	HTTPS/SSL, Port Lock, RADIUS, TACACS+, SSH
Time Management	NTP Server/Client, SNTP

### Switch Properties

IGMP Groups	1024
MAC Table Size	8 K
Max. No. of VLANs	64
Packet Buffer Size	1 Mbits
Priority Queues	4
VLAN ID Range	VID 1 to 4094

### Serial Interface

Console Port	RS-232 (TxD, RxD, GND), 10-pin RJ45 (115200, n, 8, 1)
--------------	---

### DIP Switch Configuration

Ethernet Interface	Turbo Ring, Master, Coupler, Reserve
--------------------	--------------------------------------

## Input/Output Interface

Alarm Contact Channels	1, Relay output with current carrying capacity of 0.5 A @ 48 VDC
Digital Input Channels	1
Digital Inputs	Max. input current: 8 mA +13 to +30 V for state 1 -30 to +3 V for state 0

## Power Parameters

Input Voltage	48 VDC, Redundant dual inputs
Operating Voltage	44 to 57 VDC
Input Current	5.36 A @ 48 VDC
Power Consumption (Max.)	Max. 17.28 W full loading without PDs' consumption
Power Budget	Max. 240 W for total PD consumption Max. 36 W for each PoE port
Connection	2 removable 2-contact terminal block(s)
Overload Current Protection	Supported
Reverse Polarity Protection	Supported

## Physical Characteristics

Housing	Metal
IP Rating	IP30
Dimensions	79.2 x 135 x 105 mm (3.12 x 5.31 x 4.13 in)
Weight	1030 g (2.28 lb)
Installation	DIN-rail mounting, Wall mounting (with optional kit)

## Environmental Limits

Operating Temperature	EDS-P510A-8PoE-2GTXSFP: -10 to 60°C (14 to 140°F) EDS-P510A-8PoE-2GTXSFP-T: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

## Standards and Certifications

Safety	UL 508
EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Hazardous Locations	Class I Division 2
Railway	EN 50121-4
Traffic Control	NEMA TS2

Freefall	IEC 60068-2-31
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6

### MTBF

Time	708,972 hrs
Standards	Telcordia (Bellcore), GB

### Warranty


Warranty Period	5 years
Details	See <a href="http://www.moxa.com/tw/warranty">www.moxa.com/tw/warranty</a>

### Package Contents

Device	1 x EDS-P510A Series switch
Cable	1 x DB9 female to RJ45 10-pin
Installation Kit	4 x cap, plastic, for RJ45 port 2 x cap, plastic, for SFP slot
Documentation	1 x quick installation guide 1 x product certificates of quality inspection, Simplified Chinese 1 x product notice, Simplified Chinese 1 x warranty card
Note	SFP modules need to be purchased separately for use with this product.

## 尺寸

單位：公釐 (英吋)

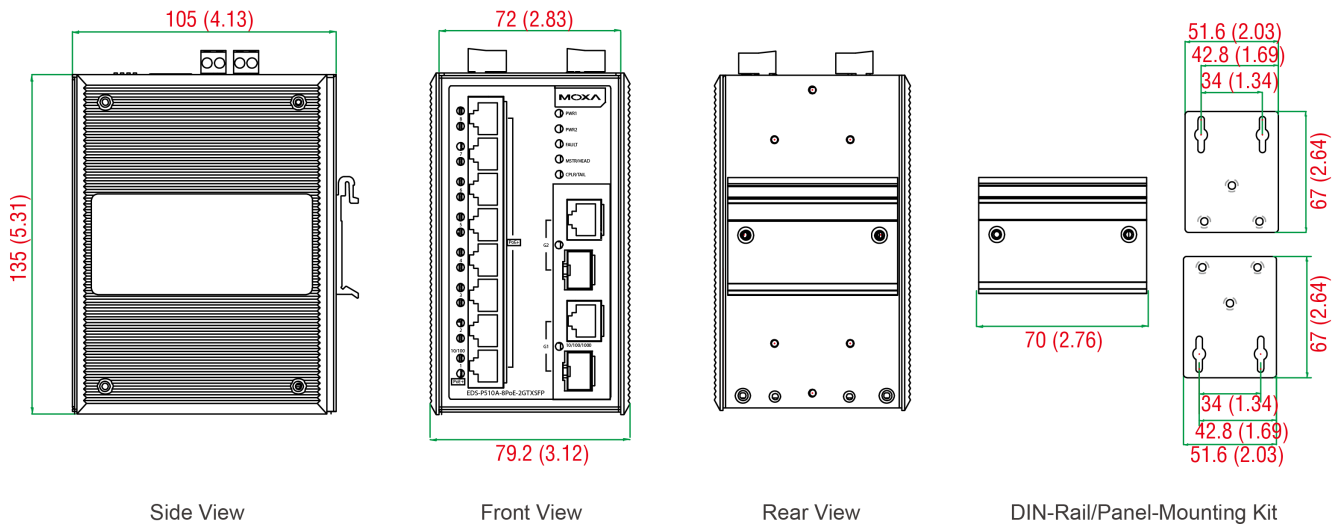

## 訂購資訊

Model Name	Combo Ports 10/100/1000BaseT(X) or 100/ 1000BaseSFP+	PoE Ports 10/100BaseT(X), RJ45 Connector	Operating Temp.
EDS-P510A-8PoE-2GTXSFP	2	8	-10 to 60°C
EDS-P510A-8PoE-2GTXSFP-T	2	8	-40 to 75°C

## 配件 (選購)

### Storage Kits

ABC-02-USB	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature
ABC-02-USB-T	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature

### SFP Modules

SFP-1FELLC-T	SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1FEMLC-T	SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature
SFP-1FESLC-T	SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1G10ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G10ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G10BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G10BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G20ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G20ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G20BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G20BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G40ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G40ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G40BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G40BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1GEZXLC	SFP module with 1 1000BaseEZX port with LC connector for 110 km transmission, 0 to 60°C operating temperature
SFP-1GEZXLC-120	SFP module with 1 1000BaseEZX port with LC connector for 120 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC-T	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature
SFP-1GLHXC	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature
SFP-1GLHXC-T	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1GLSXC	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature
SFP-1GLSXC-T	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature

SFP-1GLXLC	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature
SFP-1GLXLC-T	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature
SFP-1GSXLC	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature
SFP-1GSXLC-T	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature
SFP-1GZXLC	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature
SFP-1GZXLC-T	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature

### Power Supplies

DR-120-48	120W/2.5A DIN-rail 48 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature
DR-75-48	75W/1.6A DIN-rail 48 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature
DRP-240-48	DIN-rail 48 VDC power supply with 240W/5A, 85 to 264 VAC, or 120 to 370 VDC input, -10 to 70°C operating temperature
SDR-480P-48	DIN-rail 48 VDC power supply with 480W/10A, 90 to 264 VAC, or 127 to 370 VDC input, (current sharing up to 3840 W), -25 to 70°C operating temperature

### Wall-Mounting Kits

WK-46-01	Wall-mounting kit, 2 plates, 8 screws, 46 x 66.8 x 2 mm
----------	---

### Rack-Mounting Kits

RK-4U	19-inch rack-mounting kit
-------	---------------------------

### Software

MXview-50	Industrial network management software with a license for 50 nodes (by IP address)
MXview-100	Industrial network management software with a license for 100 nodes (by IP address)
MXview-250	Industrial network management software with a license for 250 nodes (by IP address)
MXview-500	Industrial network management software with a license for 500 nodes (by IP address)
MXview-1000	Industrial network management software with a license for 1000 nodes (by IP address)
MXview-2000	Industrial network management software with a license for 2000 nodes (by IP address)
MXview Upgrade-50	License expansion of MXview industrial network management software by 50 nodes (by IP address)

© Moxa Inc. 版權所有.2021 年 12 月 07 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。