

# MDS-G4012-4XGS 系列

8 GbE + 4 10GbE 連接埠 Layer 2 全 Gigabit 模組化網管型乙太網路交換器



## 特色與優點

- 多種介面類型模組，可實現更大多功能性
- 最多 8 個 Gigabit 乙太網路連接埠或 SFP 插槽和 4 個內嵌 10G 乙太網路連接埠
- 免工具設計，無需關閉交換器即可輕鬆新增或更換模組
- 超緊湊尺寸和多種安裝選項，可實現靈活安裝
- 被動背板，可最大限度地減少維護工作
- 堅固的壓鑄設計，適用於惡劣環境
- 直覺式、基於 HTML5 的網頁介面，可在不同平台提供無縫體驗
- 高 EMC 抗擾性，符合 IEC 61850-3 和 IEEE 1613 標準
- 硬體式 IEEE 1588 PTP，用於高精度時間同步

## 認證



## 簡介

MDS-G4012-4XGS 系列模組化交換器支援 4 個 10GbE + 8 個 Gigabit 連接埠，包括 4 個內嵌連接埠、2 個介面模組擴充插槽和 2 個電源模組插槽，確保適用多種應用的彈性。高度緊湊的 MDS-G4012-4XGS 系列旨在滿足不斷變化的網路需求，確保輕鬆安裝和維護，並採用熱插拔模組設計，使您無需關閉交換器或中斷網路操作即可輕鬆更換或新增模組。

多種類型的介面模組 (RJ45、SFP 和 PoE+) 和電源裝置 (24/48 VDC 和 110/220 VAC/VDC) 提供了更大的靈活性和對不同操作條件的適用性，提供了一個自適應的全 Gigabit 平台，具備作為乙太網聚合/邊緣交換器所需的通用性和頻寬。MDS-G4012-4XGS 系列交換器採用緊湊型設計，可安裝在狹小空間內，提供多種安裝方法和方便的免工具模組安裝方式，無需高技能工程師即可實現多功能且輕鬆的部署。憑藉多項產業認證和高耐用度的外殼，MDS-G4012-4XGS 系列可以在惡劣和危險的環境中可靠操作，例如變電站、採礦場、ITS 以及石油和天然氣應用。支援雙 LV 或 HV 電源模組，為高可靠性和可用性提供備援，也為適應不同應用的電源要求提供靈活性。

此外，MDS-G4012-4XGS 系列配備基於 HTML5 的使用者易用網頁介面，可在不同平台和瀏覽器上提供回應靈敏、流暢的使用者體驗。

## 規格

### Ethernet Interface

Pre-installed Modules	4 embedded 10Gigabit ports
Module	2 slots for optional FE/GE modules

Slot Combination	<p>See the LM-7000H module series datasheet for more information.</p> <p>Note: The required power module depends on the choice of LM-7000H module. Refer to the following power/module combination requirements.</p> <p>LM-7000H non-PoE modules: Any power module</p> <p>LM-7000H PoE modules: PWR-HV-P48-A, PWR-LV-P48-A only</p>
Standards	<p>IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3ab for 1000BaseT(X) IEEE 802.3z for 1000BaseX IEEE 802.3x for flow control IEEE 802.3ad for Port Trunk with LACP IEEE 802.1Q for VLAN Tagging IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1X for authentication</p>

### Ethernet Software Features

Management	<p>IPv4/IPv6 Flow control Back Pressure Flow Control DHCP Server/Client ARP DHCP Relay Agent (Option 82) Fiber check RARP LLDP Linkup Delay Port Mirroring (SPAN, RSPAN) SMTP SNMP Trap SNMP Inform SNMPv1/v2c/v3 RMON TFTP SFTP HTTP HTTPS Telnet Syslog Private MIB</p>
Filter	<p>GMRP GVRP GARP 802.1Q VLAN IGMP Snooping v1/v2/v3 IGMP Querier</p>
Redundancy Protocols	<p>STP RSTP Turbo Ring v2 Turbo Chain Ring Coupling Link Aggregation MRP MSTP Network Loop Protection MRP Interconnection Multiple Dual Homing Multiple Network Coupling Tracking</p>
Security	<p>Broadcast storm protection DHCP Snooping Dynamic ARP Inspection</p>

	<p>IP Source Guard Rate Limit Trust access control Static Port Lock MAC Sticky HTTPS/SSL SSH RADIUS TACACS+ Login and Password Policy Secure Boot MAC Authentication Bypass Access control list IEEE 802.1AE MAC security</p>
Time Management	<p>SNTP IEEE 1588v2 PTP (hardware-based) Supported power profiles: IEEE 1588 Default 2008, IEC 61850-9-3-2016, IEEE C37.238-2017 NTP Server/Client NTP Authentication</p>
Protocols	<p>IPv4/IPv6 TCP/IP UDP ICMP ARP RARP TFTP DNS NTP Client DHCP Server DHCP Client 802.1X QoS HTTPS HTTP Telnet SMTP SNMPv1/v2c/v3 RMON Syslog VLAN Assignment</p>
Industrial Protocols	<p>EtherNet/IP Modbus TCP PROFINET</p>
MIB	<p>P-BRIDGE MIB Q-BRIDGE MIB IEEE8021-SPANNING-TREE-MIB IEEE8021-PAE-MIB IEEE8023-LAG-MIB LLDP-EXT-DOT1-MIB LLDP-EXT-DOT3-MIB SNMPv2-MIB RMON MIB Groups 1, 2, 3, 9</p>
Power Substation	<p>GOOSE Check MMS 1588 PTP Power Profile IEC 61850-9-3 1588 PTP Power Profile C37.238-2017</p>
<b>Switch Properties</b>	
MAC Table Size	16 K
Max. No. of VLANs	256
VLAN ID Range	VID 1 to 4094
IGMP Groups	1024

Jumbo Frame Size	9.216 KB
Priority Queues	8
Packet Buffer Size	12 Mbits

#### LED Interface

LED Indicators	PWR, EPS, STATE, SYNC, FAULT, MSTR/HEAD, CPLR/TAIL
----------------	--

#### Serial Interface

Console Port	RS-232 (RJ45)
--------------	---------------

#### USB Interface

USB Connector	USB Type A
---------------	------------

#### Input/Output Interface

Digital Input Channels	1 (On MGMT Module)
Digital Inputs	+13 to +30 V for state 1 -30 to +3 V for state 0 Max. input current: 8 mA
Alarm Contact Channels	3 (On MGMT, PWR1, PWR2 Module) Relay output with current carrying capacity of 2 A @ 30 VDC
Buttons	Reset button

#### Power Parameters

Input Voltage	<p>With PWR-HV-P48-A installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz, PoE: 48 VDC</p> <p>With PWR-LV-P48-A installed: 24/48 VDC, PoE: 48 VDC</p> <p>With PWR-HV-NP installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz</p> <p>With PWR-LV-NP installed: 24/48 VDC</p>
Operating Voltage	<p>With PWR-HV-P48-A installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz, PoE: 46 to 57 VDC</p> <p>With PWR-LV-P48-A installed: 18 to 72 VDC, PoE: 46 to 57 VDC</p> <p>With PWR-HV-NP installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz</p> <p>With PWR-LV-NP installed: 18 to 72 VDC</p>
Input Current	<p>With PWR-HV-P48-A/PWR-HV-NP installed: Max. 0.38 A @ 110 VDC Max. 0.20 A @ 220 VDC Max. 0.75 A @ 110 VAC Max. 0.48 A @ 220 VAC</p> <p>With PWR-LV-P48-A/PWR-LV-NP installed: Max. 1.90 A @ 24 VDC Max. 0.95 A @ 48 VDC</p> <p>EPS (PoE models only): Max. 8.2 A @ 48 VDC</p> <p>Note: These are the input current ratings for the device with the maximum number of modules installed.</p>

Power Consumption (Max.)	<p>With PWR-HV-P48-A/PWR-HV-NP installed:  Max. 41.8 W @ 110 VDC  Max. 44.2 W @ 220 VDC  Max. 46.6 W @ 110 VAC  Max. 46.5 W @ 220 VAC</p> <p>With PWR-LV-P48-A/PWR-LV-NP installed:  Max. 45.8 W @ 24 VDC  Max. 45.8 W @ 48 VDC</p> <p>Note: These are the maximum power consumption ratings for the device with the maximum number of modules installed.</p>
Overload Current Protection	Supported
Reverse Polarity Protection	Supported
Max. PoE Power Output per Port	36 W
Total PoE Power Budget	<p>Max. 360 W (with one power supply) for total PD consumption at 48 VDC input for PoE systems</p> <p>Max. 360 W (with one power supply) for total PD consumption at 53 to 57 VDC input for PoE+ systems</p> <p>Max. 720 W (with two power supplies) for total PD consumption at 48 VDC input for PoE systems</p> <p>Max. 720 W (with two power supplies) for total PD consumption at 53 to 57 VDC input for PoE+ systems</p>

### Physical Characteristics

IP Rating	IP40
Dimensions	197 x 115 x 163.25 mm (7.76 x 4.53 x 6.43 in) 212 x 115 x 163.25 mm (8.35 x 4.53 x 6.43 in) with dual PWR-HV-P48-A/PWR-LV-P48-A power modules installed
Weight	3,030 g (6.68 lb)
Installation	DIN-rail mounting Wall mounting (with optional kit) Rack mounting (with optional kit)

### Environmental Limits

Operating Temperature	-40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

### Standards and Certifications

Safety	EN IEC 62368-1 IEC 62368-1 UL 62368-1 IEC 60950-1 UL 61010-2-201 EN 61010-2-201
EMC	EN 55032/35 EN 61000-6-2/-6-4
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV

	IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11 Voltage Dips & Interruptions
Railway	EN 50121-4
Traffic Control	NEMA TS2
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-31
Vibration	IEC 60068-2-6
Power Substation	IEC 61850-3 IEEE 1613

#### MTBF

Time	794,532 hrs
Standards	Telcordia Standard SR-332

#### Warranty


Warranty Period	5 years
Details	See <a href="http://www.moxa.com/tw/warranty">www.moxa.com/tw/warranty</a>

#### Package Contents

Device	1 x MDS-G4012-4XGS Series switch
Installation Kit	Preinstalled, 2 x DIN-rail kit 4 x cap, plastic, for SFP+ slots
Documentation	1 x quick installation guide 1 x product notice, Simplified Chinese 1 x product certificates of quality inspection, Simplified Chinese 1 x warranty card
Note	This product requires additional modules (sold separately) to function.

## 尺寸

單位：公釐（英吋）

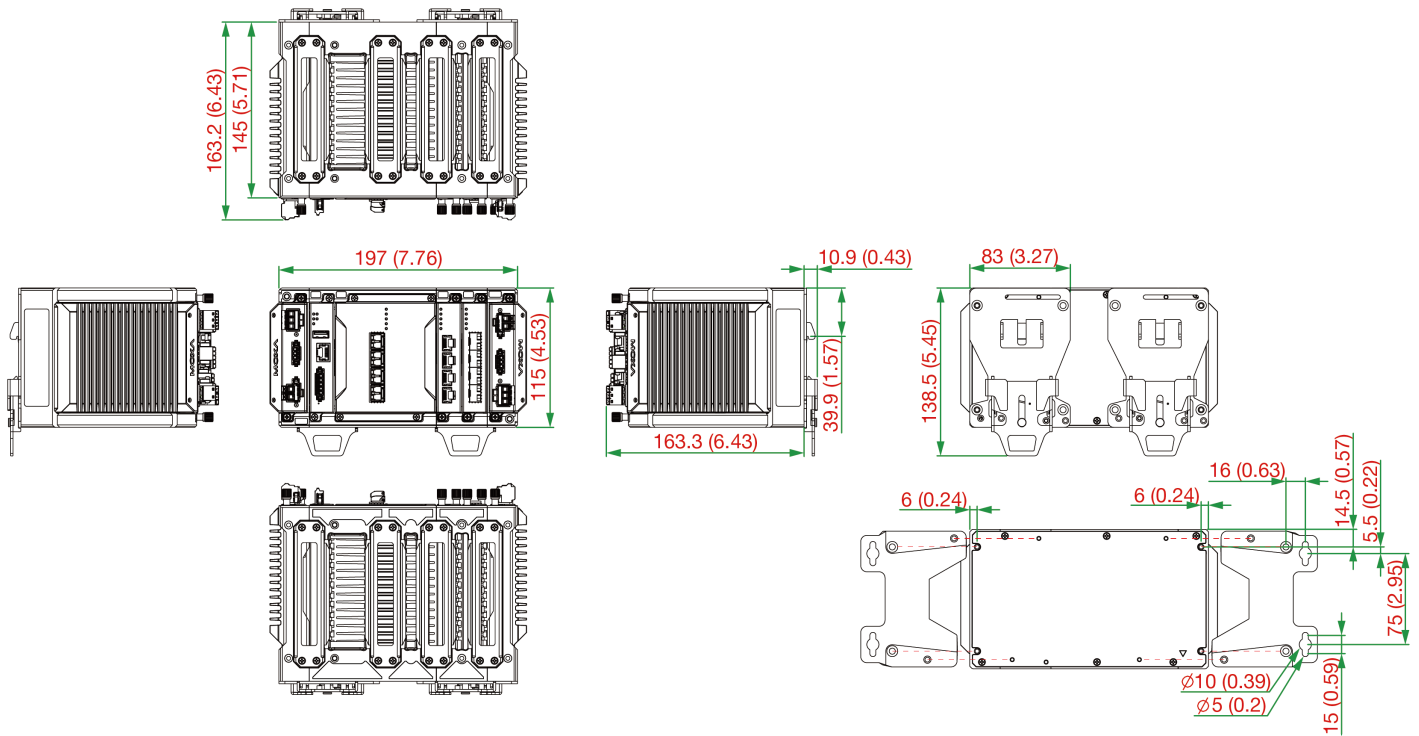

## 訂購資訊

Model Name	Layer	Total No. of Ports	10G SFP+ Slots	100/1000Base SFP Slots	10/100/1000BaseT(X) Ports RJ45 Connector	10/100BaseT(X) Ports RJ45 Connector	Operating Temp.
MDS-G4012-4XGS-T	2	12	4	Up to 8	Up to 8	Up to 8	-40 to 75°C

## 配件（選購）

### LM-7000H Module Series

LM-7000H-4GTX	Gigabit Ethernet module with 4 10/100/1000BaseT(X) ports
LM-7000H-4GPoE	Gigabit Ethernet module with 4 10/100/1000BaseT(X) IEEE 802.3af/at PoE+ ports
LM-7000H-4GSFP	Gigabit Ethernet module with 4 100/1000BaseSFP slots
LM-7000H-4TX	Fast Ethernet module with 4 10/100BaseT(X) ports
LM-7000H-4PoE	Fast Ethernet module with 4 10/100BaseT(X) IEEE 802.3af/at PoE+ ports

### Power Modules

PWR-LV-P48-A	24/48 VDC power supply module with system power, relay, PoE power input, advanced heat sink
PWR-HV-P48-A	110/220 VAC/VDC power supply module with system power, relay, PoE power input, advanced heat sink
PWR-LV-NP	Power supply module (24/48 VDC) with system power input, relay
PWR-HV-NP	Power supply module (110/220 VAC/VDC) with system power input, relay

### Wall-Mounting Kits

WK-112-01	Wall-mounting kit, 2 plates, 8 screws
-----------	---------------------------------------

### Rack-Mounting Kits

RK-3U-02	Rack-mounting kit with 4 L-shaped plates for the MDS-G4000 and MDS-G4000-4XGS Series
----------	--

### SFP Modules

SFP-10GERLC-T	SFP+ module with 1 10GBase-ER port, LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-10GLRLC-T	SFP+ module with 1 10GBase-LR port, LC connector for 10 km transmission, -40 to 85°C operating temperature
SFP-10GSRLC-T	SFP+ module with 1 10GBase-SR port, LC connector for 33m/82m/300m/400m transmission, -40 to 85°C operating temperature
SFP-10GZRLC-T	SFP+ module with 1 10GBase-ZR port, LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1FELLC-T	SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1FEMLC-T	SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature
SFP-1FESLC-T	SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1G10ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G10ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G10BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G10BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G20ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G20ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G20BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G20BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G40ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G40ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G40BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G40BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1GEZXC	SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature
SFP-1GEZXC-120	SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC-T	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature
SFP-1GLHXC	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature
SFP-1GLHXC-T	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1GLSXC	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature
SFP-1GLSXC-T	SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature
SFP-1GLXC	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature



SFP-1GLXLC-T	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature
SFP-1GSXLC	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature
SFP-1GSXLC-T	SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature
SFP-1GZXLC	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature
SFP-1GZXLC-T	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1GTXRJ45-T	SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature

### Power Supplies

HDR-60-24	60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature
NDR-120-24	120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature
NDR-120-48	120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature
NDR-240-48	240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature

### Cables

CN20070	10-pin RJ45 to DB9 female serial cable
---------	--

### Storage Kits

ABC-02-USB	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature
ABC-02-USB-T	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature

© Moxa Inc. 版權所有.2025 年 7 月 22 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。