

EDR-810シリーズ

スイッチ/ファイアウォール/NAT/VPNを備えた8+2Gマルチポート産業用セキュアルータ



機能とメリット

- 8+2Gオールインワンファイアウォール/NAT/VPN/ルータ/スイッチ
- VPNによる安全なリモートアクセストンネル
- ステートフルファイアウォールによる重要な資産の保護
- PacketGuard技術による産業プロトコルの検査
- ネットワークアドレス変換(NAT)を使用した簡単なネットワーク設定
- RSTP/Turbo Ring冗長プロトコルは、ネットワーク冗長性を強化
- -40~75°Cの動作温度範囲 (-Tモデル)
- IEC 62443/NERC CIPに基づくセキュリティ機能
- インテリジェントSettingCheck機能を使用してファイアウォール設定をチェック

認証



EN 50121-4



製品紹介

EDR-810は、ファイアウォール/NAT/VPNおよび管理されたレイヤ2スイッチ機能を備えた高度に統合された産業用マルチポートセキュアルータです。これは、重要な遠隔制御または監視ネットワーク上のイーサネットベースのセキュリティアプリケーション用に設計されており、水処理施設のポンプおよび処理システム、石油およびガスアプリケーションのDCSシステム、ならびにファクトリーオートメーションのPLC/SCADAシステムを含む重要なサイバー資産の保護のための電子セキュリティ周辺機器を提供します。EDR-810シリーズには、以下のサイバーセキュリティ機能が搭載されています。

- ファイアウォール/NAT：ファイアウォールポリシーは、異なる信頼ゾーン間のネットワークトラフィックを制御し、ネットワークアドレス変換（NAT）は、外部ホストによる不正なアクティビティから内部LANを保護します。
- VPN：仮想プライベートネットワーク（VPN）は、パブリックインターネットからプライベートネットワークにアクセスするときに、ユーザーに安全な通信トンネルを提供するように設計されています。VPNは、ネットワーク層ですべてのIPパケットの暗号化と認証にIPsec（IPセキュリティ）サーバーまたはクライアントモードを使用して、機密性と送信者認証を確保します。

EDR-810の「WANルーティングクイック設定」は、ユーザーがWANおよびLANポートを設定してルーティング機能を4つの手順で作成するための簡単な方法を提供します。また、EDR-810の「クイックオートメーションプロファイル」を使用すると、エンジニアは、EtherNet/IP、Modbus TCP、EtherCAT、FOUNDATIONフィールドバス、PROFINETなどの一般的なオートメーションプロトコルを使用してファイアウォールフィルタリング機能を簡単に設定できます。ユーザーは、シングルクリックによる使い勝手のよいWeb UIから容易にセキュアなイーサネットネットワークを作成することができ、EDR-810はディープModbus TCPパケット検査を行うことができます。危険な-40~75°Cの環境で確実に動作する広温度範囲モデルもご用意しています。

仕様

Input/Output Interface

Alarm Contact Channels	Resistive load: 1 A @ 24 VDC
Buttons	Reset button
Digital Input Channels	+13 to +30 V for state 1 -30 to +3 V for state 0 Max. input current: 8 mA

Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	8
100/1000BaseSFP Slots	2
Standards	IEEE 802.1Q for VLAN Tagging IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) Static Port Trunk IEEE 802.3u for 100BaseT(X) IEEE 802.3x for flow control IEEE 802.3z for 1000BaseSX/LX/LHX/ZX

Ethernet Software Features

Broadcast Forwarding	IP directed broadcast, broadcast forwarding
Management	Back Pressure Flow Control, DDNS, DHCP Server/Client, Web Console (HTTP/HTTPS), LLDP, QoS/CoS/ToS, SNMPv1/v2c/v3, Telnet, TFTP
Multicast Routing	DVMRP, PIM-SM, PIM-SSM
Redundancy Protocols	RSTP, STP, Turbo Ring v2
Routing	Throughput: 10,000 packets per second (max. 100 Mbps)
Routing Redundancy	VRRP
Security	All models: HTTPS/SSL, SSH, L2TP (server), RADIUS EDR-810-VPN-2GSFP Series: HTTPS/SSL, SSH, IPsec, OpenVPN (client and server), UDP and TCP Tunnel mode (routing) and TAP mode (bridge), L2TP (server), RADIUS, L2TP (server), RADIUS
Time Management	NTP Server/Client, SNTP
Unicast Routing	OSPF, RIPV1/V2, Static Route
Filter	IGMP v1/v2/v3

Switch Properties

VLAN ID Range	VID 1 to 4094
IGMP Groups	256
Max. No. of VLANs	16

LED Interface

LED Indicators	STATE, PWR1, PWR2, FAULT, 10/100/1000M
----------------	--

DoS and DDoS Protection

Technology	ARP-Flood, FIN Scan, ICMP-Death, NEWWithout-SYN Scan, NMAP-ID Scan, NMAP-Xmas Scan, Null Scan, SYN/FIN Scan, SYN/RST Scan, SYN-Flood, Xmas Scan
------------	---

Firewall

Deep Packet Inspection	Modbus TCP Modbus UDP
Filter	DDoS, Ethernet protocols, ICMP, IP address, MAC address, Ports
Quick Automation Profiles	DNP, EtherCAT, EtherNet/IP, FOUNDATION Fieldbus, FTP, HTTP, IEC 60870-104, IPsec, L2TP, LonWorks, Modbus TCP, PPTP, PROFINET, RADIUS, SSH, Telnet
Stateful Inspection	Router firewall Transparent (bridge) firewall
Throughput	Max. 10,000 packets per second (max. 100 Mbps)

IPsec VPN

Authentication	EDR-810-VPN-2GSFP Series: MD5 and SHA (SHA-256), RSA (key size: 1024-bit, 2048-bit), X.509 v3 certificate
Concurrent VPN Tunnels	EDR-810-VPN-2GSFP Series: Max. 10 IPsec VPN tunnels
Encryption	EDR-810-VPN-2GSFP Series: DES, 3DES, AES-128, AES-192, AES-256
Protocols	EDR-810-VPN-2GSFP Series: IPsec, L2TP (server), PPTP (client)
Throughput	EDR-810-VPN-2GSFP Series: Max. 17 Mbps (Conditions: AES-256, SHA-256)

NAT

Features	1-to-1, N-to-1, Port forwarding
----------	---------------------------------

OpenVPN

Authentication	EDR-810-VPN-2GSFP Series: User password by MD5 and SHA1
Concurrent VPN Tunnels	EDR-810-VPN-2GSFP Series: Client Mode: max. 2 external servers Server Mode: max. 5 external clients
Encryption	EDR-810-VPN-2GSFP Series: AES-128/192/256 CBC, Blowfish CBC, DES CBC, DES-EDE3 CBC
Protocols	EDR-810-VPN-2GSFP Series: OpenVPN (client and server), UDP, and TCP Tunnel mode (routing) and TAP mode (bridge)
Throughput	EDR-810-VPN-2GSFP Series: Max. 5 Mbps

Real-Time Firewall / VPN Event Log

Event Type	All models: Firewall event EDR-810-VPN-2GSFP Series: VPN event
Media	Local storage, SNMP Trap, Syslog server

Serial Interface

Console Port	RS-232 (TxD, RxD, GND), 3-pin (115200, n, 8, 1)
--------------	---

Power Parameters

Connection	Removable terminal block
Input Voltage	12 to 48 VDC
Input Current	0.706 A @ 12 VDC, 0.353 A @ 24 VDC, 0.187 A @ 48 VDC
Reverse Polarity Protection	Supported

Physical Characteristics

Housing	Metal
Dimensions	53.6 x 135 x 105 mm (2.11 x 5.31 x 4.13 in)
Weight	830 g (2.10 lb)
Installation	DIN-rail mounting, Wall mounting (with optional kit)

Environmental Limits

Operating Temperature	Standard Models: -10 to 60°C (14 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

Safety	UL 508
EMC	EN 55032/24
Hazardous Locations	UL/cUL Class I Division 2 Groups A/B/C/D
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Railway	EN 50121-4
Traffic Control	NEMA TS2
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

MTBF

Time	981,954 hrs
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/jp/warranty

Package Contents

Device	1 x EDR-810 Series secure router
Cable	1 x DB9 female to RJ45 10-pin
Installation Kit	4 x cap, plastic, for RJ45 port 2 x cap, plastic, for SFP slot
Documentation	1 x document and software CD 1 x quick installation guide 1 x warranty card
Note	SFP modules need to be purchased separately for use with this product.

寸法

単位：mm（インチ）

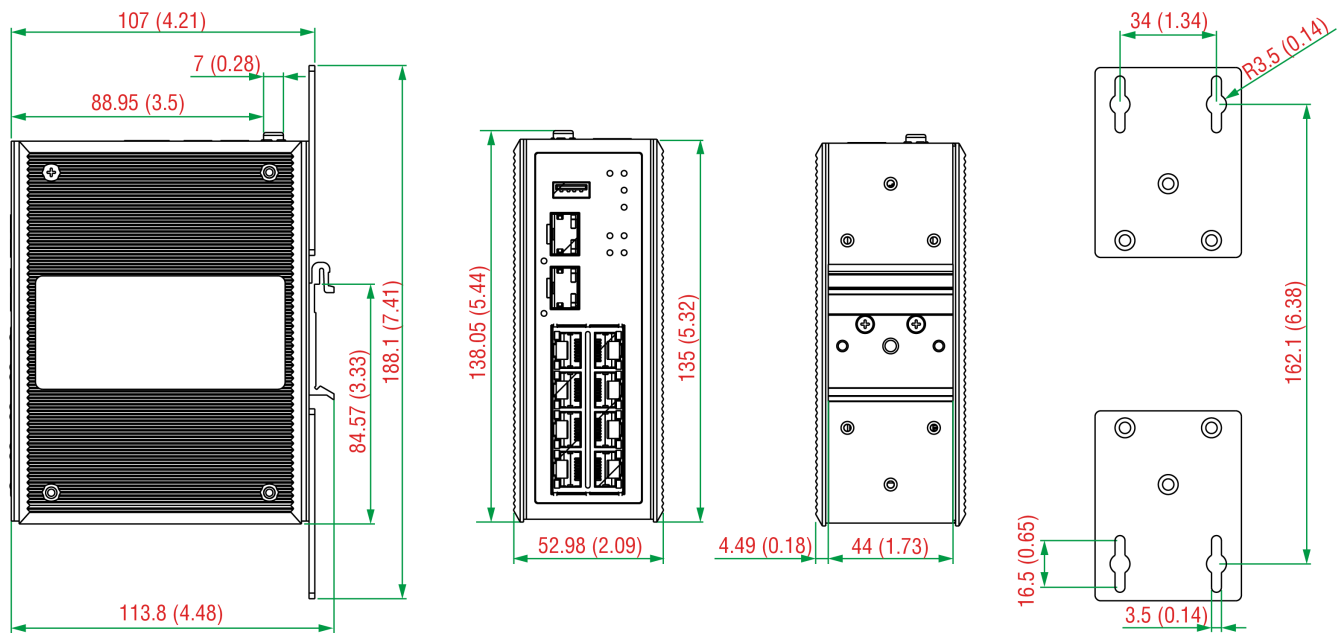

側面図

前面図

背面図/
DIN レールキット

パネル取り付けキット

注文情報

Model Name	10/100BaseT(X) Ports RJ45 Connector	100/1000Base SFP Slots	Firewall	NAT	VPN	Operating Temp.
EDR-810-2GSFP	8	2	P	P	-	-10 to 60°C
EDR-810-2GSFP-T	8	2	P	P	-	-40 to 75°C
EDR-810-VPN-2GSFP	8	2	P	P	P	-10 to 60°C
EDR-810-VPN-2GSFP-T	8	2	P	P	P	-40 to 75°C

アクセサリ（別売）

Storage Kits

ABC-02-USB	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature
ABC-02-USB-T	Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature

SFP Modules

SFP-1FELLC-T	SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1FEMLC-T	SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature
SFP-1FESLC-T	SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1G10ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G10ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G10BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature

SFP-1G10BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G20ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G20ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G20BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G20BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1G40ALC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature
SFP-1G40ALC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature
SFP-1G40BLC	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature
SFP-1G40BLC-T	WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature
SFP-1GEZXLC	SFP module with 1 1000BaseEZX port with LC connector for 110 km transmission, 0 to 60°C operating temperature
SFP-1GEZXLC-120	SFP module with 1 1000BaseEZX port with LC connector for 120 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature
SFP-1GLHLC-T	SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature
SFP-1GLHXL	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature
SFP-1GLHXL-T	SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature
SFP-1GLSXL	SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature
SFP-1GLSXL-T	SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature
SFP-1GLXL	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature
SFP-1GLXL-T	SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature
SFP-1GSXL	SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature
SFP-1GSXL-T	SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature
SFP-1GZXLC	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature
SFP-1GZXLC-T	SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature
SFP-1GTXRJ45-T	SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature

Power Supplies

DR-120-24	120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature
DR-4524	45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature
DR-75-24	75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature

MDR-40-24	DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
MDR-60-24	DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature

Wall-Mounting Kits

WK-51-01	Wall-mounting kit, 2 plates, 6 screws, 51.6 x 67 x 2 mm
----------	---

Rack-Mounting Kits

RK-4U	19-inch rack-mounting kit
-------	---------------------------

Software

MXview-50	Industrial network management software with a license for 50 nodes (by IP address)
MXview-100	Industrial network management software with a license for 100 nodes (by IP address)
MXview-250	Industrial network management software with a license for 250 nodes (by IP address)
MXview-500	Industrial network management software with a license for 500 nodes (by IP address)
MXview-1000	Industrial network management software with a license for 1000 nodes (by IP address)
MXview-2000	Industrial network management software with a license for 2000 nodes (by IP address)
MXview Upgrade-50	License expansion of MXview industrial network management software by 50 nodes (by IP address)

© Moxa Inc. All rights reserved. 2020年3月26日更新。

Moxa Inc.の明白な許可を書面で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。