

# EDS-408Aシリーズ

## 8ポートエントリーレベルマネージドイーサネット・スイッチ



### 機能と特長

- Turbo RingおよびTurbo Chain（リカバリ時間はスイッチ250台で20ミリ秒未満）をサポートし、RSTP/STPでネットワーク冗長性を実現
- IGMP Snooping、QoS、IEEE 802.1Q VLANおよびポートベースのVLANをサポート
- Webブラウザ、CLI、Telnet/シリアルコンソール、Windowsユーティリティ、ABC-01による簡単なネットワーク管理
- PROFINETまたはEtherNet/IPがデフォルトで有効（PNまたはEIPモデル）
- 簡単に視覚化された産業用ネットワーク管理を行うためのMXstudioに対応

### 認証



### 製品紹介

EDS-408Aシリーズは、特に産業用途向けに設計されています。スイッチは、Turbo Ring、Turbo Chain、リングカップリング、IGMPスヌーピング、IEEE 802.1Q VLAN、ポートベースVLAN、QoS、RMON、帯域幅管理、ポートミラーリング、電子メールまたはリレーによる警告など、さまざまな便利な管理機能をサポートしています。すぐに使用できるTurbo Ringは、Webベースの管理インターフェース、またはEDS-408Aスイッチの上部パネルにあるDIPスイッチを使用して簡単にセットアップできます。

### その他の機能とメリット

- 各ポリシーに応じてIPアドレスを割り当てるDHCP Option 82
- デバイスの管理および監視用のEtherNet/IP、Modbus TCP、およびPROFINET<sup>1</sup>プロトコルをサポート
- EtherNet/IP EDS（電子データシート）ファイル、カスタムAOI（アドオン指示）、FactoryTalk<sup>®</sup> Viewフェースプレートが利用可能
- PROFINET GSDMLファイルおよびSIMATIC STEP 7デバイスアイコンが利用可能<sup>1</sup>
- オンラインデバッグ用のポートミラーリング
- ポートベースのVLAN、IEEE 802.1Q VLAN、GVRPでネットワークブランチングを簡素化
- QoS（IEEE 802.1pおよびTOS/DiffServ）
- プロアクティブで効率の高いネットワーク監視のためのRMON
- 異なるレベルのネットワーク管理セキュリティを実現するSNMPv1/v2c/v3
- 想定外のネットワーク状況を防ぐ帯域幅管理

### 仕様

#### Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	EDS-408A/408A-T, EDS-408A-EIP/PN models: 8 EDS-408A-MM-SC/MM-ST/SS-SC models: 6 EDS-408A-3M-SC/3M-ST/3S-SC/3S-SC-48/1M2S-SC/2M1S-SC models: 5  All models support: Auto negotiation speed Full/Half duplex mode Auto MDI/MDI-X connection
100BaseFX Ports (multi-mode SC connector)	EDS-408A-MM-SC/2M1S-SC models: 2 EDS-408A-3M-SC models: 3 EDS-408A-1M2S-SC models: 1
100BaseFX Ports (multi-mode ST connector)	EDS-408A-MM-ST models: 2 EDS-408A-3M-ST models: 3
100BaseFX Ports (single-mode SC connector)	EDS-408A-SS-SC/1M2S-SC models: 2

1. EDS-408A-PNシリーズのみ

	EDS-408A-2M1S-SC models: 1 EDS-408A-3S-SC/3S-SC-48 models: 3																																											
Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1w for Rapid Spanning Tree Protocol																																											
Optical Fiber	<table border="1"> <thead> <tr> <th colspan="2" rowspan="2"></th> <th colspan="2">100BaseFX</th> </tr> <tr> <th>Multi-Mode</th> <th>Single-Mode</th> </tr> <tr> <th rowspan="2">Fiber Cable Type</th> <th>OM1</th> <td>50/125 <math>\mu</math>m</td> <td rowspan="2">G.652</td> </tr> <tr> <td></td> <td>800 MHz x km</td> </tr> <tr> <th colspan="2">Typical Distance</th> <td>4 km</td> <td>40 km</td> </tr> <tr> <th rowspan="3">Wavelength</th> <th>Typical (nm)</th> <td colspan="2">1300</td> </tr> <tr> <th>TX Range (nm)</th> <td>1260 to 1360</td> <td>1280 to 1340</td> </tr> <tr> <th>RX Range (nm)</th> <td>1100 to 1600</td> <td>1100 to 1600</td> </tr> <tr> <th rowspan="4">Optical Power</th> <th>TX Range (dBm)</th> <td>-10 to -20</td> <td>0 to -5</td> </tr> <tr> <th>RX Range (dBm)</th> <td>-3 to -32</td> <td>-3 to -34</td> </tr> <tr> <th>Link Budget (dB)</th> <td>12</td> <td>29</td> </tr> <tr> <th>Dispersion Penalty (dB)</th> <td>3</td> <td>1</td> </tr> </thead> <tbody> <tr> <td colspan="4"> <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> </td> </tr> </tbody> </table>			100BaseFX		Multi-Mode	Single-Mode	Fiber Cable Type	OM1	50/125 $\mu$ m	G.652		800 MHz x km	Typical Distance		4 km	40 km	Wavelength	Typical (nm)	1300		TX Range (nm)	1260 to 1360	1280 to 1340	RX Range (nm)	1100 to 1600	1100 to 1600	Optical Power	TX Range (dBm)	-10 to -20	0 to -5	RX Range (dBm)	-3 to -32	-3 to -34	Link Budget (dB)	12	29	Dispersion Penalty (dB)	3	1	<p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p>			
				100BaseFX																																								
		Multi-Mode	Single-Mode																																									
Fiber Cable Type	OM1	50/125 $\mu$ m	G.652																																									
		800 MHz x km																																										
Typical Distance		4 km	40 km																																									
Wavelength	Typical (nm)	1300																																										
	TX Range (nm)	1260 to 1360	1280 to 1340																																									
	RX Range (nm)	1100 to 1600	1100 to 1600																																									
Optical Power	TX Range (dBm)	-10 to -20	0 to -5																																									
	RX Range (dBm)	-3 to -32	-3 to -34																																									
	Link Budget (dB)	12	29																																									
	Dispersion Penalty (dB)	3	1																																									
<p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p>																																												

### Ethernet Software Features

Filter	802.1Q VLAN GMRP GVRP IGMP v1/v2 Port-based VLAN
Industrial Protocols	EtherNet/IP Modbus TCP EDS-408A-PN models: PROFINET IO Device (Slave)
Management	Back Pressure Flow Control BOOTP DHCP Option 66/67/82 DHCP Server/Client Flow control IPv4/IPv6 LLDP Port Mirror RARP RMON SMTP SNMP Inform SNMPv1/v2c/v3 Syslog Telnet TFTP
MIB	Bridge MIB Ethernet-like MIB MIB-II

	P-BRIDGE MIB RMON MIB Groups 1, 2, 3, 9 RSTP MIB
Redundancy Protocols	RSTP STP Turbo Chain Turbo Ring v1/v2
Time Management	NTP Server/Client SNTP

### Switch Properties

IGMP Groups	256
MAC Table Size	8 K
Max. No. of VLANs	64
Packet Buffer Size	1 Mbits
Priority Queues	4
VLAN ID Range	VID 1 to 4094

### Serial Interface

Console Port	RS-232 (TxD, RxD, GND), 10-pin RJ45 (115200, n, 8, 1)
--------------	---

### DIP Switch Configuration

Ethernet Interface	Turbo Ring, Master, Coupler, Reserve
--------------------	--------------------------------------

### Input/Output Interface

Alarm Contact Channels	Relay output with current carrying capacity of 1 A @ 24 VDC
------------------------	---

### Power Parameters

Connection	1 removable 6-contact terminal block(s)
Input Voltage	All models: Redundant dual inputs EDS-408A/408A-T, EDS-408A-MM-SC/MM-ST/SS-SC/3M-SC/3M-ST/3S-SC/1M2S-SC/ 2M1S-SC/EIP/PN models: 12/24/48 VDC EDS-408A-3S-SC-48/408A-3S-SC-48-T models: $\pm 24/\pm 48$ VDC
Operating Voltage	EDS-408A/408A-T, EDS-408A-MM-SC/MM-ST/SS-SC/3M-SC/3M-ST/3S-SC/1M2S-SC/ 2M1S-SC/EIP/PN models: 9.6 to 60 VDC  EDS-408A-3S-SC-48 models: $\pm 19$ to $\pm 60$ VDC <sup>2</sup>
Input Current	EDS-408A, EDS-408A-EIP/PN/MM-SC/MM-ST/SS-SC models: 0.61 @ 12 VDC 0.3 @ 24 VDC 0.16 @ 48 VDC  EDS-408A-3M-SC/3M-ST/3S-SC/1M2S-SC/2M1S-SC models: 0.73 @ 12 VDC 0.35 @ 24 VDC 0.18 @ 48 VDC  EDS-408A-3S-SC-48 models: 0.33 A @ 24 VDC 0.17 A @ 48 VDC

2. <sup>2</sup> -60 to -19 VDC or 19 to 60 VDC.電源極性システムを混在させないでください。

Overload Current Protection	Supported
Reverse Polarity Protection	Supported
<b>Physical Characteristics</b>	
Housing	Metal
IP Rating	IP30
Dimensions	53.6 x 135 x 105 mm (2.11 x 5.31 x 4.13 in)
Weight	EDS-408A, EDS-408A-MM-SC/MM-ST/SS-SC/EIP/PN models: 650 g (1.44 lb) EDS-408A-3M-SC/3M-ST/3S-SC/3S-SC-48/1M2S-SC/2M1S-SC models: 890 g (1.97 lb)
Installation	DIN-rail mounting Wall mounting (with optional kit)
<b>Environmental Limits</b>	
Operating Temperature	Standard Models: -10 to 60°C (14 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
<b>Standards and Certifications</b>	
Safety	All models: UL 508 EDS-408A/408A-T, EDS-408A-MM-SC/MM-ST/SS-SC models, EDS-EIP/PN models: UL 6095-01. EN 62368-1
EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF
Hazardous Locations	EDS-408A, EDS-408A-MM-SC/MM-ST/SS-SC/EIP/PN models: ATEX, Class I Division 2, IECEx
Railway	EN 50121-4
Traffic Control	EDS-408A, EDS-408A-MM-SC/MM-ST/SS-SC/EIP/PN models: NEMA TS2
Vibration	IEC 60068-2-6
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-31
Maritime	All models, exclude EDS-408A-3S-SC-48-(T): DNV, NK, LR EDS-408A, EDS-408A-MM-SC/MM-ST/SS-SC/EIP/PN models: ABS
<b>MTBF</b>	
Time	EDS-408A, EDS-408A-EIP/PN models: 1,339,439 hrs EDS-408A-MM-SC/MM-ST/SS-SC/3M-SC/3M-ST/3S-SC/1M2S-SC/2M1S-SC models: 1,253,072 hrs EDS-408A-3S-SC-48 models: 989,940 hrs
Standards	Telcordia (Bellcore), GB

## Warranty


Warranty Period	5 years
Details	See <a href="http://www.moxa.com/jp/warranty">www.moxa.com/jp/warranty</a>

## Package Contents

Device	1 x EDS-408A Series switch
Cable	1 x RJ45-to-DB9 console cable
Installation Kit	4 x cap, plastic, for RJ45 port
Documentation	1 x product certificates of quality inspection, Simplified Chinese 1 x product notice, Simplified Chinese 1 x quick installation guide 1 x warranty card

## 寸法

単位: mm (インチ)

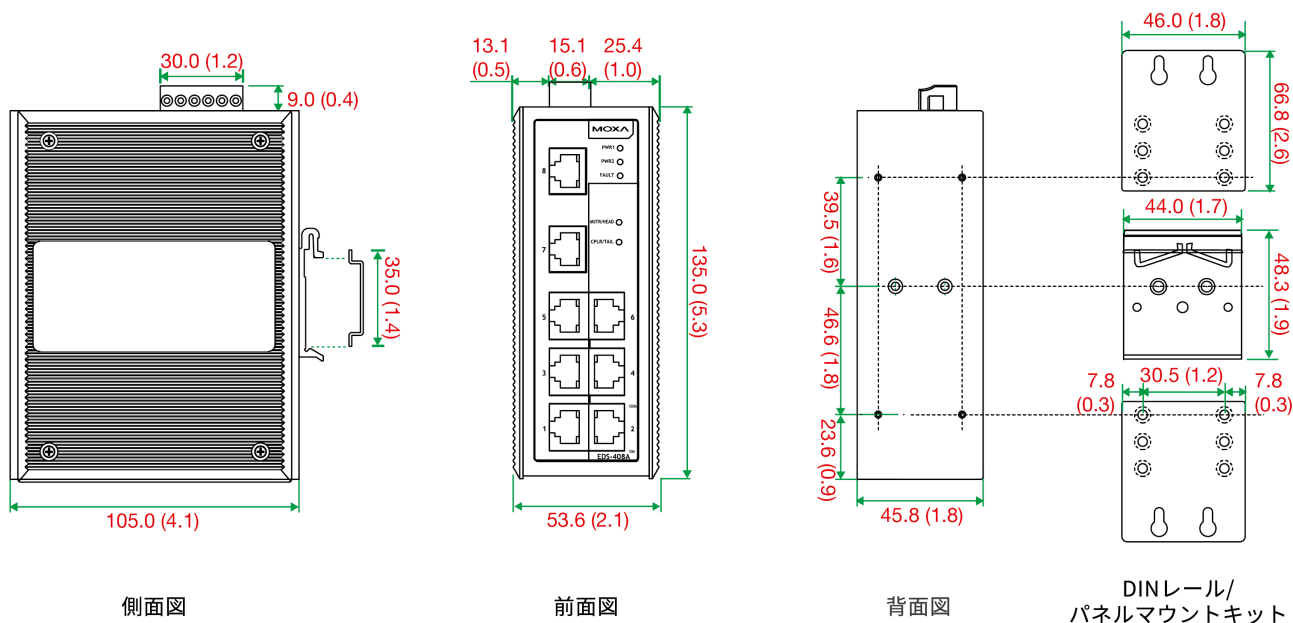

## 注文情報

Model Name	Layer	Total No. of Ports	10/100BaseT(X) Ports RJ45 Connector	100BaseFX Ports Multi-Mode, SC Connector	100BaseFX Ports Multi-Mode, ST Connector	100BaseFX Ports Single-Mode, SC Connector	Operating Temp.
EDS-408A	2	8	8	-	-	-	-10 to 60°C
EDS-408A-T	2	8	8	-	-	-	-40 to 75°C
EDS-408A-MM-ST	2	8	6	-	2	-	-10 to 60°C
EDS-408A-MM-ST-T	2	8	6	-	2	-	-40 to 75°C
EDS-408A-MM-SC	2	8	6	2	-	-	-10 to 60°C
EDS-408A-MM-SC-T	2	8	6	2	-	-	-40 to 75°C
EDS-408A-SS-SC	2	8	6	-	-	2	-10 to 60°C
EDS-408A-SS-SC-T	2	8	6	-	-	2	-40 to 75°C
EDS-408A-3M-ST	2	8	5	-	3	-	-10 to 60°C
EDS-408A-3M-ST-T	2	8	5	-	3	-	-40 to 75°C

Model Name	Layer	Total No. of Ports	10/100BaseT(X) Ports RJ45 Connector	100BaseFX Ports Multi-Mode, SC Connector	100BaseFX Ports Multi-Mode, ST Connector	100BaseFX Ports Single-Mode, SC Connector	Operating Temp.
EDS-408A-3M-SC	2	8	5	3	-	-	-10 to 60°C
EDS-408A-3M-SC-T	2	8	5	3	-	-	-40 to 75°C
EDS-408A-3S-SC	2	8	5	-	-	3	-10 to 60°C
EDS-408A-3S-SC-T	2	8	5	-	-	3	-40 to 75°C
EDS-408A-3S-SC-48	2	8	5	-	-	3	-10 to 60°C
EDS-408A-3S-SC-48-T	2	8	5	-	-	3	-40 to 75°C
EDS-408A-1M2S-SC	2	8	5	1	-	2	-10 to 60°C
EDS-408A-1M2S-SC-T	2	8	5	1	-	2	-40 to 75°C
EDS-408A-2M1S-SC	2	8	5	2	-	1	-10 to 60°C
EDS-408A-2M1S-SC-T	2	8	5	2	-	1	-40 to 75°C
EDS-408A-EIP	2	8	8	-	-	-	-10 to 60°C
EDS-408A-EIP-T	2	8	8	-	-	-	-40 to 75°C
EDS-408A-PN	2	8	8	-	-	-	-10 to 60°C
EDS-408A-PN-T	2	8	8	-	-	-	-40 to 75°C

## アクセサリ（別売）

### Storage Kits

ABC-01	Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature
--------	--

### Power Supplies

HDR-60-24	60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature
NDR-120-24	120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature
NDR-120-48	120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature
NDR-240-48	240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature
MDR-40-24	DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
MDR-60-24	DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature

### Software

MXview-50	MXview license for 50 nodes
MXview-100	MXview license for 100 nodes
MXview-250	MXview license for 250 nodes
MXview-500	MXview license for 500 nodes
MXview-1000	MXview license for 1000 nodes
MXview-2000	MXview license for 2000 nodes
MXview Upgrade-50	MXview license expansion for 50 nodes

## Wall-Mounting Kits

WK-46-01

Wall-mounting kit, 2 plates, 8 screws, 46 x 66.8 x 2 mm

## Rack-Mounting Kits

RK-4U

19-inch rack-mounting kit

© Moxa Inc. All rights reserved. 2024年3月4日更新。

Moxa Inc.の明白な許可を written で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。