



# NPort 5600-8-DTL

## Quick Installation Guide

Third Edition, April 2015

### Overview

The NPort 5600-8-DTL series includes the following models:

- **NPort 5610-8-DTL:** 8 ports, RS-232, 0 to 60°C
- **NPort 5650-8-DTL:** 8 ports, RS-232/422/485, 0 to 60°C
- **NPort 5650I-8-DTL:** 8 ports, RS-232/422/485, 0 to 60°C, 2KV optical isolation.
- **NPort 5610-8-DTL-T:** 8 ports, RS-232, -40 to 75°C
- **NPort 5650-8-DTL-T:** 8 ports, RS-232/422/485, -40 to 75°C
- **NPort 5650I-8-DTL-T:** 8 ports, RS-232/422/485, 2KV optical isolation, -40 to 75°C

### Package Checklist

The NPort 5600-8-DTL package should contain the following items:

- NPort 5600-8-DTL device server
- Wall mounting and DIN-Rail kits
- Stick-on pads
- Power adapter (not including T models)
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card

### Optional Accessories\*



- **DK-35A:** DIN-Rail mounting kit (35 mm)

*Note: Please notify your sales representative if any of the above items are missing or damaged.*


\*Optional Accessories can be ordered separately.

## Hardware Introduction

### Top and Rear Views

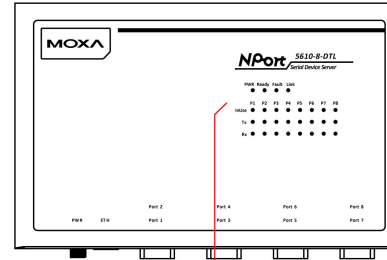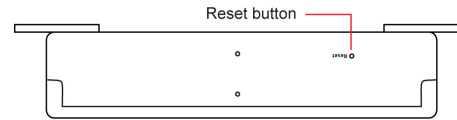

### Front View

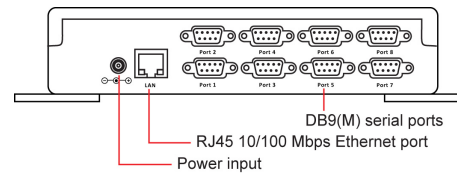

### Reset Button

Use a pointed object to hold the reset button down for at least five seconds to load the factory defaults. Release the reset button when the Ready LED stops blinking.

### LED Indicators

The LED indicators on the top panel are used to display the status as follows:

Name	Color	Function
PWR	red	Power is on.
	off	Power is off.
Ready	green	Steady: NPort is operational
		Blinking: NPort is responding to NPort Administrator "Locate" function or NPort is resetting to factory default
	off	Power is off or fault condition exists.
Fault	red	IP conflict or DHCP or BOOTP server did not respond properly.
	off	No fault condition detected.

Name	Color	Function
Link	green	Steady: Network is connected; no data is being transmitted. Blinking: Network is connected; data is being transmitted.
	off	Ethernet cable is disconnected or has a short.
InUse (P1 to P8)	green	Serial port has been opened by server side software.
	off	Serial port is not currently opened by server side software.
TX/RX (P1 to P8)	green (Tx)	Serial device is transmitting data.
	orange (Rx)	Serial device is receiving data.
	off	No data is flowing to or from the serial port.

## Hardware Installation


**STEP 1:** After removing the NPort 5600-8-DTL from the box, place it on a desktop or other horizontal surface. Connect the 12-48 VDC power adaptor to the NPort 5600-8-DTL's power input when using an AC power source, or connect the NPort 5600-8-DTL's terminal block directly to a DC power source.

**STEP 2:** Use an Ethernet cable to connect the NPort 5600-8-DTL to a network hub or switch. You can also connect directly to your computer's Ethernet port, which is convenient for initial configuration or testing.

**STEP 3:** Connect the NPort 5600-8-DTL's serial port to a serial device.

### Wall or Cabinet Mounting

The NPort 5600-8-DTL comes with two metal attachment plates to allow installation on a wall or the inside of a cabinet. First, attach the brackets to the back of the NPort with screws. Next, mount the unit on a wall or cabinet with screws. Screws should be less than 6.0 mm in head diameter, and less than 3.5 mm in shaft diameter.

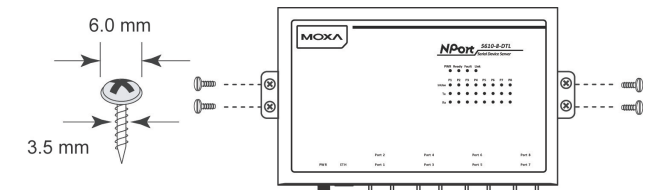


P/N: 180205600012




## DIN-Rail Mounting

DIN-Rail attachments can be purchased separately to attach the product to a DIN-Rail. The DIN-Rail attachments should be oriented with the metal springs on top.

### Standard Attachment



### DK-35A Attachment




## Software Installation Information

To install **NPort Administration Suite**, insert the NPort **Document & Software CD** into your PC's CD-ROM drive. Locate and run the setup program and follow the on-screen instructions. The setup program will be named **Npadm\_Setup\_[Version]\_Build\_[DateTime].exe** (e.g., "Npadm\_Setup\_Ver1.16\_Build\_11021010.exe"). Refer to the NPort 5600-8-DTL User's Manual for more details.

## Pin Assignments

### DB9 Male Ports

Pin	RS-232	RS-422/ RS-485-4W	RS-485-2W
1	DCD	TxD-(A)	–
2	RxD	TxD+(B)	–
3	TxD	RxD+(B)	Data+(B)
4	DTR	RxD-(A)	Data-(A)
5	GND	GND	GND
6	DSR	–	–
7	RTS	–	–
8	CTS	–	–
9	–	–	–



*Note: The NPort 5610-8-DTL supports RS-232 only.*

## Specifications

### LAN

**Ethernet Ports:** 10/100 Mbps (RJ45)  
**Protection:** Built-in 1.5 KV magnetic isolation

### Serial Interface

**RS-232:** NPort 5610-8-DTL  
**RS-232/422/485:** NPort 5650-8-DTL, 5650I-8-DTL  
**Serial Ports:** 8 (DB9-M connectors)  
**Isolation:** 2 KV isolation (NPort 5650I-8-DTL)

### Serial Signals

**RS-232:** TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND  
**RS-422:** Tx+, Tx-, Rx+, Rx-, GND  
**RS-485 (2-wire):** Data+, Data-, GND  
**RS-485 (4-wire):** Tx+, Tx-, Rx+, Rx-, GND  
**Serial Line Protection:** 15 KV ESD for all signals  
**RS-485 Data Direction:** ADDC™ (Automatic Data Direction Control)

### Serial Communication Parameters

**Parity:** None, Even, Odd, Space, Mark  
**Data Bits:** 5, 6, 7, 8  
**Stop Bit(s):** 1, 1.5, 2  
**Flow Control:** RTS/CTS, DSR/DTR (for RS-232 only), XON/XOFF  
**Transmission Speed:** 50 bps to 921.6 Kbps

### Power Requirements

**Power Input:** 12 to 48 VDC

### Physical Characteristics

**Operating Temperature:**  
 Standard Models: 0 to 60°C (32 to 140°F)  
 Wide Temp. Models: -40 to 75°C (-40 to 167°F)  
**Storage Temperature:** -40 to 85°C (-40 to 185°F)  
**Operating Humidity:** 5 to 95% RH  
**Material:** SECC sheet metal (0.8 mm)

### Dimensions:

Without ears: 197 × 44 × 125 mm  
 With ears: 229 × 46 × 125 mm  
 With DIN-Rail kit: 197 × 52.8 × 125 mm

### Certifications

**Regulatory Approvals:** FCC Class A, CE Class A, UL 60950-1, LVD

**Warranty:** 5 years

**MOXA**® [www.moxa.com/support](http://www.moxa.com/support)

The Americas: +1-714-528-6777 (toll-free: 1-888-669-2872)  
 Europe: +49-89-3 70 03 99-0  
 Asia-Pacific: +886-2-8919-1230  
 China: +86-21-5258-9955 (toll-free: 800-820-5036)

© 2015 Moxa Inc., All Rights Reserved